
Drive belt 25X5000 SWR

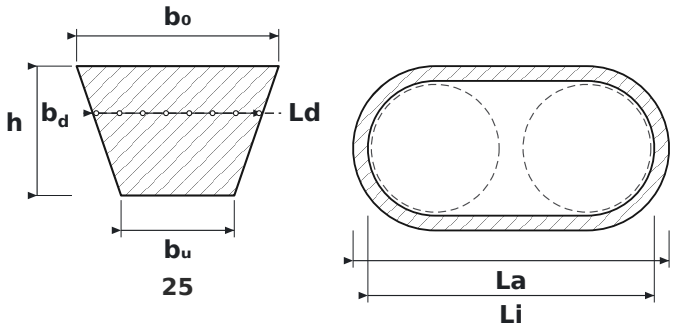

DIMENSIONS

b0	belt top width	**25 mm**
h	belt height	**16 mm**
bu	belt bottom width	**14 mm**
bd	datum width (at the pitch line)	**21 mm**
Ld	datum length – measured along the pitch line	**5,061 mm**
La	outside length of the belt	**5,100 mm**
Li	inside length of the belt	**5,000 mm**

SPECIFICATIONS

Manufacturer	**SWR**
Manufacturer designation	**25X5000**
Type	**Classical V-belt**
Belt section	**25**
Ld – datum length (effective Lw/Lp)	**5,061 mm**
Li – inside length	**5,000 mm**
La – outside length	**5,100 mm**
b_0 – top width	**25 mm**
h – belt height	**16 mm**
b_u – bottom width	**14 mm**
b^d – datum width	**21 mm**
Standard	**DIN 2215 / ISO 4184**
Recommended min. pulley diameter	**250 mm**
Mass per metre	**0.42 kg/m**
Dimensions source	**Katalog pasów klinowych Optibelt**