
Thrust roller bearing 29268-E1-MB FAG

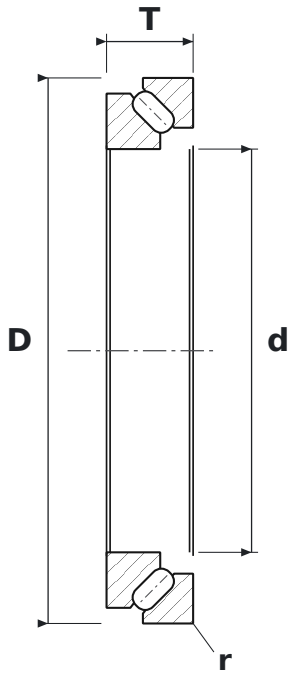

DIMENSIONS

d	bore diameter	**340 mm**
D	outside diameter	**460 mm**
T	bearing height	**73 mm**
d1	shaft washer outside diameter	**435 mm**
D1	housing washer bore diameter	**395 mm**
r	chamfer dimension (min.)	**3 mm**

WHAT 29268-E1-MB MEANS

E1	reinforced design E1 (FAG)
MB	machined brass cage, inner ring centred

SPECIFICATIONS

Manufacturer	**FAG**
Manufacturer designation	**29268-E1-MB**
r min – chamfer dimension	**3 mm**
Rolling elements	**single-row spherical roller bearing**
Basic dynamic load rating C	**1,410 kN**
Basic static load rating C0	**6,600 kN**
Limiting speed	**1,350 r/min**
Reference speed	**740 r/min**
Mass	**32.88 kg**