Thrust roller bearing 29292-E1-MB FAG

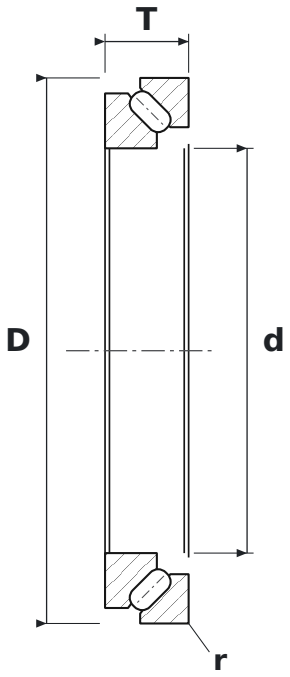

DIMENSIONS

d	bore diameter	**460 mm**
D	outside diameter	**620 mm**
T	bearing height	**95 mm**
d1	shaft washer outside diameter	**585 mm**
D1	housing washer bore diameter	**530 mm**
r	chamfer dimension (min.)	**5 mm**

WHAT 29292-E1-MB MEANS

E1	reinforced design E1 (FAG)
MB	machined brass cage, inner ring centred

SPECIFICATIONS

Manufacturer	**FAG**
Manufacturer designation	**29292-E1-MB**
r min – chamfer dimension	**5 mm**
Rolling elements	**single-row spherical roller bearing**
Basic dynamic load rating C	**2,550 kN**
Basic static load rating C0	**12,200 kN**
Limiting speed	**970 r/min**
Reference speed	**540 r/min**
Mass	**76.3 kg**