
Thrust roller bearing 293/500 E.M STEYR

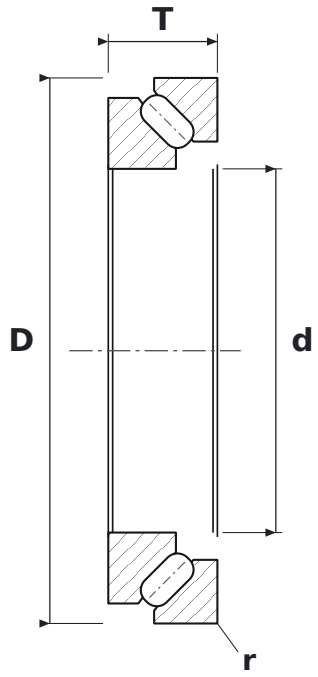

DIMENSIONS

d	bore diameter	**500 mm**
D	outside diameter	**750 mm**
T	bearing height	**150 mm**
d1	shaft washer outside diameter	**700 mm**
D1	housing washer bore diameter	**611 mm**
r	chamfer dimension (min.)	**6 mm**

WHAT 293/500 E.M MEANS

E	reinforced design, higher load rating
M	machined brass cage

SPECIFICATIONS

Manufacturer	**STEYR**
Manufacturer designation	**293/500 E.M**
r min – chamfer dimension	**6 mm**
Rolling elements	**single-row spherical roller bearing**
Basic dynamic load rating C	**5,900 kN**
Basic static load rating C0	**22,000 kN**
Limiting speed	**800 r/min**
Reference speed	**400 r/min**
Mass	**222 kg**