
Thrust roller bearing 293/530 E.M STEYR

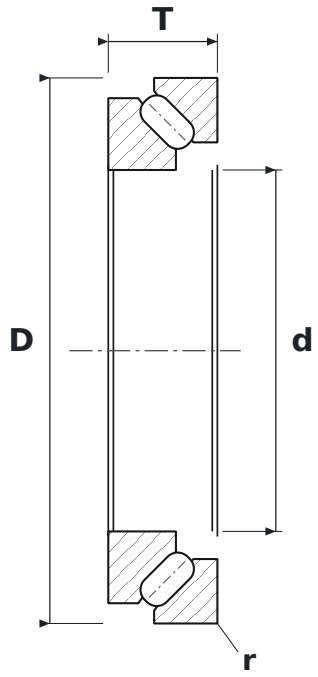

DIMENSIONS

d	bore diameter	**530 mm**
D	outside diameter	**800 mm**
T	bearing height	**160 mm**
d1	shaft washer outside diameter	**745 mm**
D1	housing washer bore diameter	**648 mm**
r	chamfer dimension (min.)	**7.5 mm**

WHAT 293/530 E.M MEANS

E	reinforced design, higher load rating
M	machined brass cage

SPECIFICATIONS

Manufacturer	**STEYR**
Manufacturer designation	**293/530 E.M**
r min – chamfer dimension	**7.5 mm**
Rolling elements	**single-row spherical roller bearing**
Basic dynamic load rating C	**6,800 kN**
Basic static load rating C0	**25,500 kN**
Limiting speed	**750 r/min**
Reference speed	**375 r/min**
Mass	**275.7 kg**