
# Drive belt 8V4750 OPTIBELT

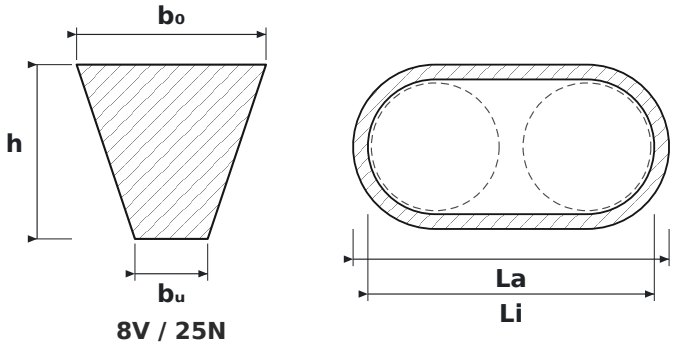


## DIMENSIONS

| | | |
|---|---|---|
| **b0** | belt top width | **25 mm** |
| **h** | belt height | **23 mm** |
| **bu** | belt bottom width | **9.6 mm** |
| **La** | outside length of the belt | **12,065 mm** |
| **Li** | inside length of the belt | **11,945 mm** |

## SPECIFICATIONS

| | |
|---|---|
| Manufacturer | **OPTIBELT** |
| Manufacturer designation | **8V4750** |
| Type | **Narrow V-belt (RMA/MPTA)** |
| Belt section | **8V / 25N** |
| Li – inside length | **11,945 mm** |
| La – outside length | **12,065 mm** |
| Belt number (inches) | **475″** |
| b₀ – top width | **25 mm** |
| h – belt height | **23 mm** |
| bᵤ – bottom width | **9.6 mm** |
| Standard | **RMA / MPTA** |
| Recommended min. pulley diameter | **315 mm** |
| Mass per metre | **0.575 kg/m** |
| Dimensions source | **Katalog pasów klinowych Optibelt** |