
Linear carriage HSR30 RQZSS THK

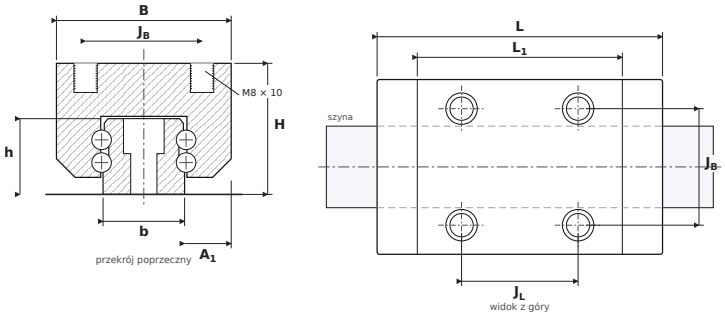

DIMENSIONS

B	carriage width	**60 mm**
H	overall height (carriage on rail)	**45 mm**
L	overall carriage length	**98 mm**
L1	body length (without end seals)	**70.4 mm**
JB	mounting hole spacing — across	**40 mm**
JL	corner hole spacing — along	**40 mm**
A1	rail flank to carriage side	**16 mm**
b	rail width	**28 mm**
h	rail height	**26 mm**

SPECIFICATIONS

Manufacturer	**THK**
Manufacturer designation	**HSR30 RQZSS**
Rolling elements	**four-row ball carriage, full complement**
Basic dynamic load rating C	**28 kN**
Basic static load rating C0	**46.8 kN**
Mass	**0.9 kg**
carriage mounting thread ($G_2 \times T_5$)	**M8 × 10 mm**
matching rail	**HSR30**
static moments M_{0x} / M_{0Y} / M_{0Z}	**524 / 524 / 562 Nm**